

The Gripple Anchor creates a secure, fixed anchoring point below the ground. No pre-digging or ground preparation is required, dramatically reducing installation time.

FEATURES / BENEFITS


- **Robust** – Designed for drive efficiency and maximum load capacity
- **Undisruptive** – Streamlined profile for minimal soil disturbance
- **Versatile** – Suitable for a variety of soil types
- **Quick** – Speed of installation delivers significant time and labour savings
- **Durable** – Zinc aluminium wire rope for maximum corrosion resistance



SPECIFICATION

Product	Wire Rope Diameter	Wire Rope Length
Anchor 3	3.00 mm	1.0 m
	3.00 mm	1.5 m
Anchor 4	4.00 mm	1.0 m
	4.00 mm	1.5 m

INSTALLATION

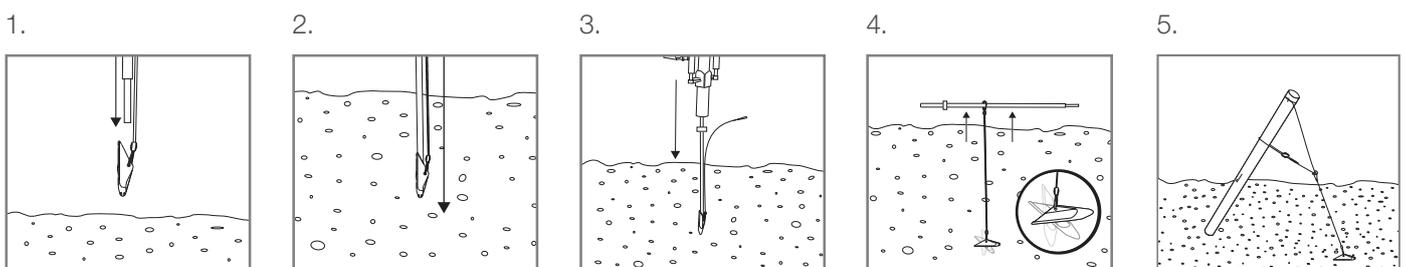

The longevity depends on location factors and soil, water & climate conditions as well as the local risk of erosion on site. PP materials are UV protected, designed for a long life.

TIPS

- Always drive the Anchor fully into the ground, to a depth of at least 1 m
- For even quicker installation of Gripple's Anchors, use the Gripple Petrol Driver

